




Características Técnicas / Technical Features

HARZ WHITE, 60X120

Porcelanato esmaltado pulido

CHARACTERISTIC	STANDARD AS PER EN 14411:2012 GROUP BIa	PRODUCER VALUE	TEST METHOD
THICKNESS	9,5mm		
LENGTH AND WIDTH Permissible deviation in% / mm of the average size of each tile from the working size	± 0,6 % or ± 2mm	± 0,1 %	EN ISO – 10545-2
THICKNESS Permissible deviation in% / mm of the average thickness of each plate from the working thickness	± 5 % or ± 0,5 mm	± 4 %	EN ISO – 10545-2
SIDE CU Permissible max. deviation from a straight line in% / mm in relation to the respective working dimensions	± 0,5 % or ± 1,5 mm	± 0,1 %	EN ISO – 10545-2
DEVIATION FROM THE RIGHT ANGLE Permissible max. deviation from the right angle line in % / mm in relation to the relevant working dimensions	± 0,5 % or ± 2 mm	± 0,1 %	EN ISO – 10545-2
SURFACE FLATNESS Permissible max. deviation from flatness of the surface	± 0,5 % or ± 2 mm	± 0,2 %	EN ISO – 10545-2
WATER ABSORPTION	≤ 0,5 %	≤ 0,5 %	EN ISO- 10545-3
FLEXURAL STRENGTH [N/mm2]	Min. 35N/mm2	Min 40N/mm2	EN ISO- 10545-4
BREAKING FORCE	Min. 1300N	Min. 2000N	EN ISO- 10545-4
ABRASION RESISTANCE (PEI)	Manufacturer's declaration	Class IV	EN ISO- 10545-7
FROST RESISTANCE	According to EN ISO 10545 - 1	Resistant	EN ISO-10545-12
RESISTANCE TO THERMAL SHOCK	According to EN ISO 10545 - 1	Resistant	EN ISO-10545-9
RESISTANCE TO CHEMICAL SUBSTANCES	Min. Class B	Min. Class A	EN ISO-10545-13
STAIN RESISTANCE	Min. Class 3	Min. Class 4	EN ISO-10545-14
REACTION TO FIRE	Manufacturer's declaration	A1fl	Classified Without Testing (CWT)
RELEASE OF CADMIUM AND LEAD	Manufacturer's declaration	Cadmium ≤0,07mg/dm2 Lead ≤0,08 mg/dm2	EN ISO 10545 - 15

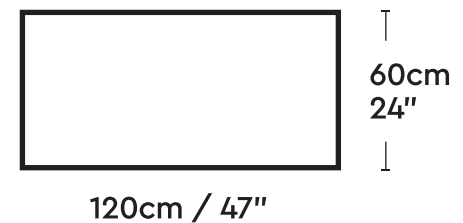

9 mm de espesor



MURO



PISO



INTERIOR



PULIDO



JUNTA
2mm



13
CARAS

Hecho en India

* No Performance Determined