


MARQUINA BLACK

Porcelanato masa coloreada

Características Técnicas / Technical Features

CLASSIFICAZIONE Classification/Classification/Klassifizierung	UNI EN 14411 / ISO 13006	App. G B I a / Annex G B I a	
LUNGHEZZA E LARGHEZZA Length and width/Longueur et largeur/Länge und Breite	EN ISO 10545/2	CONFORME In accordance Conforme Erfüllt	
ORTOGONALITÀ Wedging/Orthogonalité/Rechtwinkeligkeit			
SPESSORE Thickness/Epaisseur/Dicke			
RETTILINEITÀ DEI LATI Linearity/Rectitude/Geradheit der Kanten			
PLANARITÀ Warpage/Planéité/Ebenflächigkeit			
ASPETTO Aspect/Appearance/Aspekt			
ASSORBIMENTO D'ACQUA Water absorption/Absorption d'eau/Wasseraufnahme	EN ISO 10545/3	≤0,5%	Valore massimo singolo 0,6%
MODULO DI ROTTURA Modul of ropture/ Module de rupture/ Bruchlast	EN ISO 10545/4	≥35 N/mm ²	Valore singolo minimo 32
SFORZO DI ROTTURA Breaking strength/Résistance à la rupture/ Bruchkraft		≥1300 N Sp, Th, Ep, Dk ≥7,5mm. ≥700 N Sp, Th, Ep, Dk <7,5mm	
DETERMINAZIONE DELLA RESISTENZA ALL'URTO Determination of impact resistance/Résistance aux chocs/Schlagfestigkeit	EN ISO 10545/5	0,87	
RESISTENZA ALL'ABRASIONE SUPERFICIALE Abrasion resistance/Résistance à l'abrasion/Widerstand Tiefenverschleiss	EN ISO 10545/7	III	
COEFFICIENTE DI DILATAZIONE TERMICA LINEARE Thermal expansion coefficient/Coefficient de dilatation thermique/Ausdehnungskoeffizient	EN ISO 10545/8	7 x 10 ⁻⁶ /°C	
RESISTENZA ALLO SCIVOLAMENTO Slip resistance/Résistance à la glissance/Trittsicherheit Gewerbebereich /Trittsicherheit Barfussbereich	DIN 51130	R9	
	C.o.F B.C.R./D.M. 236 14/6/89/	μ>0,40	
	ANSI DCOF A137.1- 2012	>0,42	
RESISTENZA AGLI SBALZI TERMICI Thermal shock resistance/Résistance au choc thermique/Temperaturwechselbeständigkeit	EN ISO 10545/9	RESISTENTI Resistant Résistant Bestaendig	
DETERMINAZIONE DELLA DILATAZIONE DOVUTA ALL'UMIDITA' Determination of moisture expansion/Dilatation due à l'humidité/Dilatation Feuchtigkeit	EN ISO 10545/10	0,0 mm/m	
DETERMINAZIONE DELLA RESISTENZA AL CAVILLO Determination of crazing resistance/Resistance au fissuration/Widerstand gegen den Durfen	EN ISO 10545/11	RESISTENTI Resistant Résistant Bestaendig	
RESISTENZA AL GELO Frost resistance/Résistance au gel/Frotsicherheit	EN ISO 10545/12	RESISTENTI Resistant Résistant Bestaendig	
RESISTENZA AGLI AGENTI CHIMICI: Resistance to chemicals/Résistance aux acides et aux bases/Säure- und Laugenbeständigkeit	EN ISO 10545/13	Min class B	
RESISTENZA ALLE MACCHIE Resistance to staining/Résistance au tachege/ Fleckenbeständigkeit	EN ISO 10545/14	Min class 3	
REAZIONE al FUOCO Reaction to fire/Réaction au feu/Brandverhalten	96/603/CE	A1 _{FL} /A1	

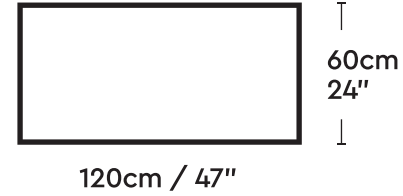

120cm / 47"

9 mm de espesor



MURO



PISO



INTERIOR



MATE



JUNTA
2mm



10
CARAS

HECHO EN
ITALIA

GANTE

Gral. Pablo A. Gonzalez Garza
#500, Colonia San Jerónimo.
Monterrey, Nuevo León.
64640

gante@gante.mx
www.gante.mx